

PoCL

(Power over Camera Link)

Mini CL

(Mini Camera Link)

Cameras for Industries



Actual Size



Black & White
KP-F500 PCL (PoCL)
KP-F500 SCL (Mini CL)
 Effective 5.05 Megapixel
 16 frame / second

Black & White
KP-F230 PCL (PoCL)
KP-F230 SCL (Mini CL)
 Effective 2.01 Megapixel
 30 frame / second

Black & White
KP-F31 PCL (PoCL)
KP-F31 SCL (Mini CL)
 Effective 0.33 Megapixel
 120 frame / second

Actual Size



Black & White
KP-F200 PCL (PoCL)
KP-F200 SCL (Mini CL)
 Effective 2.01 Megapixel
 15 frame / second

Black & White
KP-F80 PCL (PoCL)
KP-F80 SCL (Mini CL)
 Effective 0.81 Megapixel
 36 frame / second

Actual Size



Black & White
KP-F39 PCL (PoCL)
KP-F39 SCL (Mini CL)
 Effective 0.33 Megapixel
 91 frame / second

Black & White
KP-F30 PCL (PoCL)
KP-F30 SCL (Mini CL)
 Effective 0.33 Megapixel
 60 frame / second

Black & White Separate type
KP-FB30 PCL (PoCL)
KP-FB30 SCL (Mini CL)
 Effective 0.33 Megapixel, 60 frame / second



Actual Size


Color
KP-FD202 PCL (PoCL)
KP-FD202 SCL (Mini CL)
 Effective 2.01 Megapixel
 30 frame / second

Color
KP-FD140 PCL (PoCL)
KP-FD140 SCL (Mini CL)
 Effective 1.45 Megapixel
 30 frame / second

Mini CL (Mini Camera Link)


By adopting a Camera Link digital interface, higher speed video data transfer is possible.

Furthermore, by adopting the small connector (SDR) of a Mini Camera Link standard, the size of the camera has been reduced.

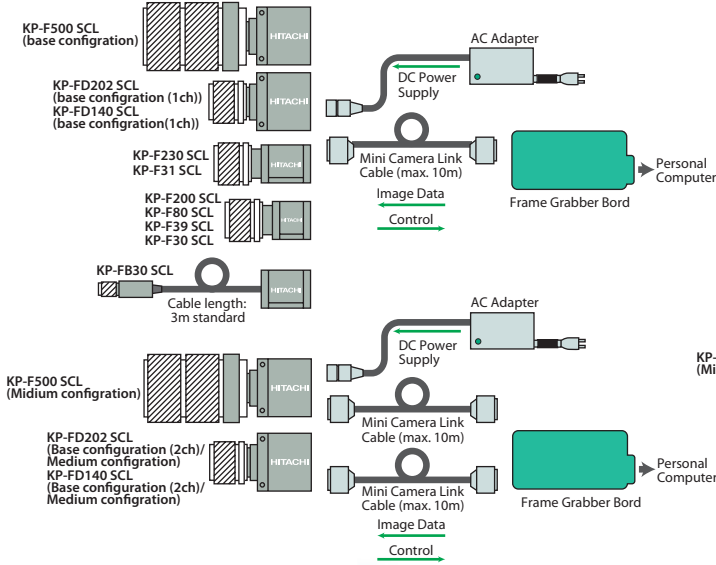

PoCL (Power over Camera Link)

The PoCL version is connected by a single (PoCL) Mini Camera Link cable directly to a frame grabber supporting PoCL. Simple systems construction is possible.

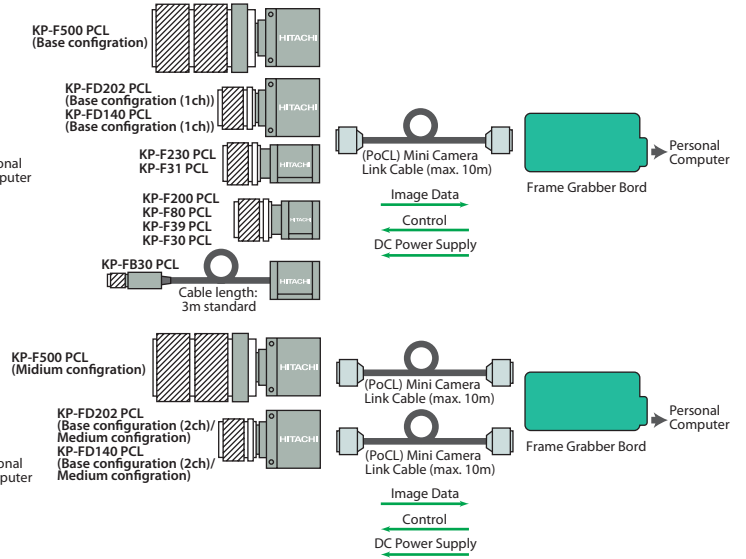

Specifications

KP-F500 PCL / SCL		KP-F230 PCL / SCL		KP-F31 PCL / SCL	KP-FB30 PCL / SCL
Imaging device	2/3-inch interline CCD	1/1.8-inch interline CCD	1/3-inch interline CCD		
Total pixels	2536 (H) x 2068(V)	1688 (H) x 1248(V)	692 (H) x 504(V)		
Effective pixels	2456 (H) x 2058(V)	1628 (H) x 1236(V)	659 (H) x 494(V)		
Active pixels	2448 (H) x 2050(V)	1628 (H) x 1236(V)	659 (H) x 494(V)		
Pixel size	3.45 (H) x 3.45 (V) μm (square lattice)	4.4 (H) x 4.4 (V) μm (square lattice)	7.4 (H) x 7.4 (V) μm (square lattice)		
Sensing area	9.93 (H) x 8.70 (V) mm	7.16 (H) x 5.44 (V) mm	4.88 (H) x 3.66 (V) mm		
Scanning system	Progressive	Progressive			
Aspect ratio	4:3	4:3			
Frame rate	16 frames/second	30 frames/second	120 frames/second	60 frames/second	
Horizontal drive frequency	64.000 MHz	72.000 MHz	49.090902 MHz	24.5454 MHz	
Horizontal scanning frequency	33.264 kHz	Horizontal: 37.5 kHz Vertical: 30 Hz	Horizontal: 62.94 kHz Vertical: 119.88 Hz	Horizontal: 31.468 kHz Vertical: 59.94 Hz	
Vertical scanning frequency	16.00 Hz	Internal			
Sync system	Internal	C mount	Special mount		
Lens mount	C mount	17.526 mm			
Flange focal distance	17.526 mm	Digital output Camera Link			
Video output	Digital output Camera Link Clk = 64 MHz x 1ch or 32 MHz x 2ch	Clk = 36 MHz x 2 TAP	Clk = 24.5454 MHz x 2TAP	Clk = 24.5454 MHz	
Resolution	Horizontal/Vertical: 2000TV lines	Horizontal/Vertical: 1200 TV lines	Horizontal: 500 TV line Vertical: 490 TV lines		
Sensitivity	400 lx, F4, 3200 K	400 lx, F4, 3200 K			
Minimum illumination	1.0 lx, F1.4, MAX GAIN, without IR cut filter	7.4 lx, F1.4, MAX GAIN			
Signal noise to ratio	50 dB	45 dB	50 dB		
Electronic shutter speed	1/16, 1/60, 1/100, 1/250, 1/1000, 1/2,000, 1/10,000, 1/50,000 second. Factory setting is off (1/16 second) or changeable by variable shutter (Minimum 1/100,000 second)	1/30 to 1/100000 second (variable setting)	1/120 to 1/100000 second (variable setting)	1/60 to 1/100000 second (variable setting)	
Gamma compensation	$\gamma = 1$	Gamma compensation	$\gamma = 1$		
Frame on demand	Remote setting (fixed shutter, one trigger and VD reset) Factory setting is all off.	Frame on demand	One trigger, fixed shutter and VD reset		
Partial scan	Selectable start position and width of picture grabbing in 1H step.	Partial scan	Selectable start position and width of picture grabbing in 1H step.		
Gamma compensation	$\gamma = 1$	Offset	0 to 128 steps level/10bit 33 steps variable (Factory setting: 0 steps level)		16 to 128 steps level/10bit 29 steps variable Factory setting: 16 steps level
Frame on demand	Remote setting (fixed shutter, one trigger and VD reset) Factory setting is all off.	Gain setting	0 to +12 dB (128 steps variable)		0 to +12 dB (301 steps variable)
Partial scan	Selectable start position and width of picture grabbing in 1H step.	Ambient temperature	Operating: 0 to +40°C (+32 to +104°F), less than 90% RH Storage: -10 to +50°C (+14 to +122°F), less than 70% RH		
Ambient temperature	Operating: 0 to +40°C (+32 to +104°F), less than 90% RH Storage: -10 to +50°C (+14 to +122°F), less than 70% RH	Power supply voltage	12 ±1 VDC		
Power supply voltage	12 ±1 VDC	Current consumption	Approx. 270 mA (Approx. 3.3 W)	Approx. 200 mA (Approx. 2.4 W)	Approx. 205 mA (Approx. 2.4 W)
Current consumption	Approx. 400 mA (Approx. 4.8 W)	External dimensions	29 (W) x 29 (H) x 38 (D) mm	29 (W) x 29 (H) x 38 (D) mm	Head: 12 (W) x 12.5 (H) x 47.5 (D) mm CCU: 29 (W) x 29 (H) x 38 (D) mm
External dimensions	44 (W) x 44 (H) x 41 (D) mm	Mass	Approx. 60 g		Head: Approx. 18 g CCU: Approx. 50g (without cable)
Mass	Approx. 110 g				

High Resolution & High Speed

High resolution combined with high frame rates are possible with this series of cameras.

Can be used for high-precision and high-speed image processing in many applications.

Then camera list

Black & White Cameras

KP-F500 PCL/SCL	5.05 Megapixel (2456(H)x2058(V))	16 frame/second
KP-F230 PCL/SCL	2.01 Megapixel (1628(H)x1236(V))	30 frame/second
KP-F200 PCL/SCL	2.01 Megapixel (1628(H)x1236(V))	15 frame/second
KP-F80 PCL/SCL	0.81 Megapixel (1034(H)x779(V))	36 frame/second
KP-F31 PCL/SCL	0.33 Megapixel (659(H)x494(V))	120 frame/second
KP-F39 PCL/SCL	0.33 Megapixel (659(H)x494(V))	91 frame/second
KP-F30 PCL/SCL	0.33 Megapixel (659(H)x494(V))	60 frame/second
KP-FB30 PCL/SCL	0.33 Megapixel (659(H)x494(V))	60 frame/second

Color Cameras

KP-FD202 PCL/SCL	2.01 Megapixel (1628(H)x1236(V))	30 frame/second
KP-FD140 PCL/SCL	1.45 Megapixel (1392(H)x1040(V))	30 frame/second

Frame Shutter

Higher resolution in the vertical directional is ensured for moving object.

Multi-step Shutter

Provided multi-step shutter or variable shutter (minimum 1/100,000 second) .

Frame on Demand

The trigger and the shutter can be used to capture an image at the desired timing and the accumulation time.

Remote Control

Through the Camera Link interface, various setting such as shutter, mode, gain, partial scan, bit width, etc can be adjusted.

Partial Scan

The start position and width of the image can be adjusted. Higher frame rates are possible by using partial scan mode.

Selectable bit width

Selectable bit width of

12-/10-/8-bit	KP-F500 PCL/SCL
10-/8-bit	KP-F230 PCL/SCL, KP-F200 PCL/SCL, KP-F80 PCL/SCL, KP-F31 PCL/SCL, KP-F39 PCL/SCL, KP-F30 PCL/SCL, KP-FB30 PCL/SCL,
36-/30-/24-bit	KP-FD202 PCL/SCL, KP-FD140 PCL/SCL

High Color Fidelity (KP-FD202 PCL/SCL, KP-FD140 PCL/SCL)

RGB primary color mosaic filter achieve a high color fidelity.

Selectable White Balance Adjustment

(KP-FD202 PCL/SCL, KP-FD140 PCL/SCL)

Selectable white balance adjustment method of ATW (auto-tracking), Manual (manual setting of R and B gain) or One-push (one-push auto adjustment)

6-Vector Independent Masking

(KP-FD202 PCL/SCL, KP-FD140 PCL/SCL)

Saturation and hue of primary colors R, G, B and complementary colors Cy, Mg, Ye can be independently varied. It is effective at a application (Image capture, microscope, etc) needed highly accurate color fidelity.



KP-F200 PCL / SCL
KP-F39 PCL / SCL

KP-F80 PCL / SCL
KP-F30 PCL / SCL

KP-FD202 PCL / SCL
KP-FD140 PCL / SCL

Specifications

	KP-F200 PCL / SCL	KP-F80 PCL / SCL	KP-F39 PCL / SCL	KP-F30 PCL / SCL
Imaging device	1/1.8-inch interline CCD	1/3-inch interline CCD		
Total pixels	1688 (H) x 1248 (V)	1077 (H) x 788 (V)	692 (H) x 504 (V)	
Effective pixels	1628 (H) x 1236 (V)	1034 (H) x 779 (V)	659 (H) x 494 (V)	
Active Pixels	1628 (H) x 1236 (V)	1024 (H) x 768 (V)	659 (H) x 494 (V)	
Pixel size	4.4 (H) x 4.4 (V) um	4.65 (H) x 4.65 (V) um	7.4 (H) x 7.4 (V) um	(square lattice)
Sensing area	7.16 (H) x 5.44 (V) mm	4.81 (H) x 3.62 (V) mm	4.88 (H) x 3.66 (V) mm	
Scanning system	Progressive			
Aspect ratio	4:3			
Frame rate	15 frames/second	36 frames/second	91 frames/second	60 frames/second
Scanning frequency	Horizontal: 18.75 kHz Vertical: 14.97 Hz	Horizontal: 28.346 kHz Vertical: 35.79 Hz	Horizontal: 46.875 kHz Vertical: 91.73 Hz	Horizontal: 31.468 kHz Vertical: 59.94 Hz
Sync system	Internal			
Lens mount	C mount (Flange focal distance=17.526 mm)			
Video output	Digital output Camera Link Clk = 36 MHz		Digital output Camera Link Clk = 24.5454 MHz	
Resolution	Horizontal/Vertical: 1200 TV lines	Horizontal/Vertical: 800 TV lines	Horizontal: 500 TV line Vertical: 490 TV lines	
Sensitivity	400 lx, F4, 3200 K	400 lx, F2.8, 3200 K	400 lx, F4, 3200 K	
Minimum illumination	1.0 lx, F1.4, MAX GAIN, without IR cut filter		7.4 lx, F1.4, MAX GAIN, without IR cut filter	1.0 lx, F1.4, MAX GAIN, without IR cut filter
Signal noise to ratio	50 dB			
Electronic shutter speed	1/15, 1/60, 1/125, 1/250, 1/1000, 1/2000, 1/10000, 1/50000 second. Factory setting is off (1/15 second) or changeable by variable shutter (Minimum 1/100000 second)	1/36, 1/60, 1/125, 1/250, 1/1000, 1/2000, 1/10000, 1/50000 second. Factory setting is off (1/36 second) or changeable by variable shutter (Minimum 1/100000 second)	1/91, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000, 1/50000 second. Factory setting is off (1/60 second) or changeable by variable shutter (Minimum 1/100000 second)	1/60, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000, 1/50000 second. Factory setting is off (1/60 second) or changeable by variable shutter (Minimum 1/100000 second)
Gamma compensation	$\gamma = 1$			
Frame on demand	Fixed shutter, one trigger and VD reset (Factory setting is all off)			
Partial scan	Selectable start position and width of picture grabbing in 1H step.			
Ambient temperature	Operating: 0 to +40°C (+32 to +104°F), less than 90 % RH Storage: -10 to +50°C (+14 to +122°F), less than 70 % RH			
Power supply voltage	12 ± 1 VDC			
Current consumption	Approx. 170 mA (Approx. 2.1 W)	Approx. 120 mA (Approx. 1.5 W)	Approx. 160 mA (Approx. 2.0 W)	Approx. 120 mA (Approx. 1.5 W)
External dimensions	29 (W) x 29 (H) x 29 (D) mm			
Mass	Approx. 50 g			

	KP-FD202 PCL / SCL	KP-FD140 PCL / SCL
Imaging device	1/1.8-inch interline CCD	1/2-inch interline CCD
Total pixels	1688 (H) x 1248 (V)	1434 (H) x 1050 (V)
Effective pixels	1628 (H) x 1236 (V)	1392 (H) x 1040 (V)
Active pixels	1600 (H) x 1200 (V)	1360 (H) x 1024 (V)
Unit cell size	4.4 (H) x 4.4 (V) um	4.65 (H) x 4.65 (V) um
Color filter	RGB primary color mosaic filter	
Scanning system	Progressive	
Sync system	Internal	
Video output		
Interface	Camera Link standard (SDR connector)	
Output format	(a) 24 bits (R: 8 bits G: 8 bits B: 8 bits) (Base configuration) (b) 30 bits (R: 10 bits G: 10 bits B: 10 bits) (Medium configuration) (c) 36 bits (R: 12 bits G: 12 bits B: 12 bits) (Medium configuration)	
Frame rate	30 frames/second (full pixel readout)	
Scanning frequency	Horizontal: 37.5 kHz Vertical: 29.95 Hz	Horizontal: 33.519 kHz Vertical: 30.13 Hz
Camera remote	Camera Link control	
Sensitivity	2000 lx, F8, 3200 K	
Minimum illumination	5.0 lx, F1.4, MAX GAIN	
Gain	Auto/Manual (0 to +18.5dB)(Approx. 0.04dB step)	
Electronic shutter speed	1/30, 1/60, 1/100, 1/250, 1/1000, 1/2000, 1/10000, 1/50000 second. Factory setting is off (1/60 second) or changeable by variable shutter (Minimum 1/100000 second)	
Frame on demand	Fixed shutter, one trigger and VD reset	Factory setting is all off
Partial scan	Selectable start position and width of picture grabbing	
Auto Exposure (ALC: Auto level control)	Adjustable for video level	
White balance	ATW / MANUAL / One-push	
Enhanced functions	Gamma: OFF / LUT, Color masking: OFF / ON (6 vector independent masking), Color saturation: Adjustable, Color level: Adjustable (Paint-black), Sharpness: Adjustable, Brightness: Adjustable	
Lens mount	C mount	
Power supply voltage	12 ± 1 VDC	
Current consumption	Approx. 400 mA (Approx. 4.8 W)	
Ambient temperature	Operating: 0 to +40°C (+32 to +104°F), less than 90 % RH Storage: -10 to +50°C (+14 to +122°F), less than 70 % RH	
External dimensions	44 (W) x 44 (H) x 41 (D) mm	
Mass	Approx. 110 g	

